


CONCRETE PAD 48"x48"x8"


Direction of user.



Model: UBX-244
 Drawing No: UBX-244
 T: (888) 315-9037 F: (866) 308-9719

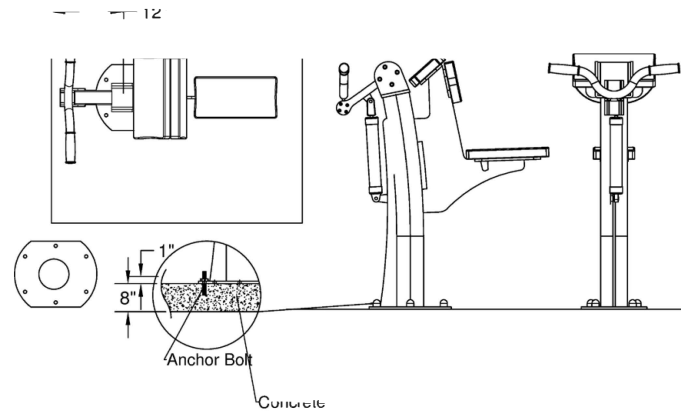


CONCRETE PAD 42"x42"x8" Direction of user.

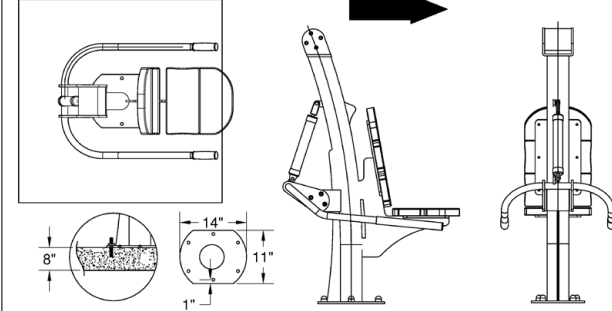

Recommended thickness of concrete slab is 8" minimum.
 32000 PSI concrete
 3/8" rebar 6" spacing



Model: Triceps Press Down
 Drawing No: UBX-244
 T: (888) 315-9037 F: (866) 308-9719

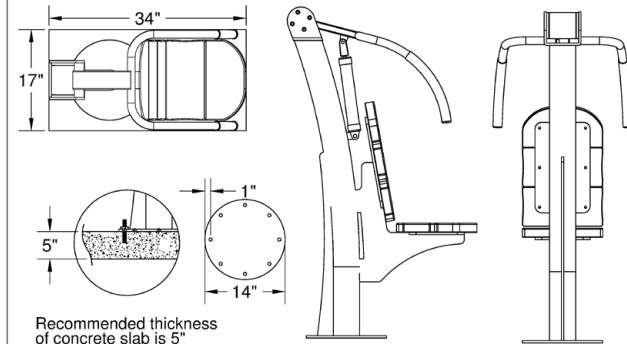

Recommended thickness of concrete slab is 5" minimum.




Model: Vertical Press
 Drawing No: UBX-247
 T: (888) 315-9037 F: (866) 308-9719



CONCRETE PAD 48"x48"x8"


Direction of user.

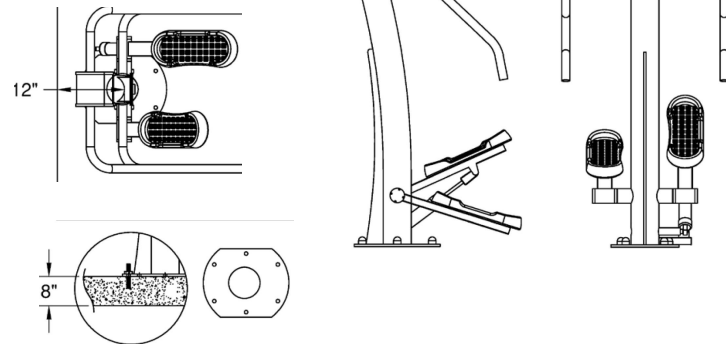

Model: ADA Triceps Press Down
 Drawing No: UBX-244W
 T: (888) 315-9037 F: (866) 308-9719



CONCRETE PAD 48"x48"x8" Direction of user.

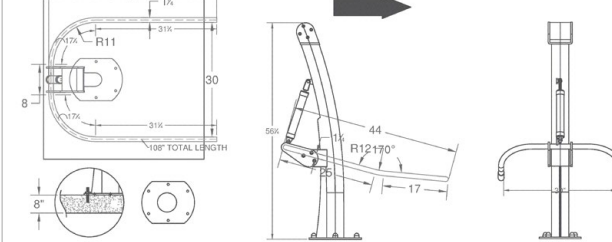

Model: ADA Triceps Press Down
 Drawing No: UBX-244W
 T: (888) 315-9037 F: (866) 308-9719

